

# Instruction Manual

## JSL-71 Easy Timer with Dual Settings

Version 1.2

### 1. Overview

This JSL-71 timer can count from 0.01 second to 9999 minutes. Operating function modes include single delay, double delay, and cycle delay. It can count-down or count-up. The timer can be activated automatically when powering up, by front key pad, or via remote switch. Two different time delay settings can be programmed. User can switch the setting with a single key press. Lock function can be activated to prevent any accidental change.

### 2. Specification

Timer range: 0.01 second to 9999 minutes  
 Timer mode: single delay, double delay, cycle delay  
 Timer trigger: power on, front key pad, or remote switch  
 Timer accuracy: <1s/day.  
 Power supply: 90-260V AC or DC.  
 Power consumption: <2W  
 Relay output:7A@240VAC,10@120VAC and 24VDC  
 Relay life: 100,000 times.  
 Operating temperature: 0-60 °C.  
 Humidity: 0-95%RH  
 Panel cutout: 44.5x44.5mm  
 Outer dimension: 48x48x85 mm.

### 3. Front Panel

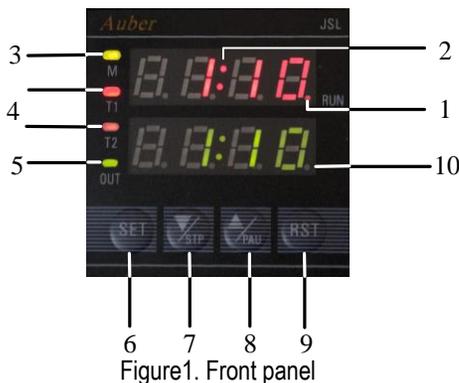


Figure1. Front panel

1. RUN indicator: (the red dot at the lower right corner).Turns on when timer starts running. Turns off when timer stops.
2. Time unit indicator: turns on when time units are M:S or H:M. Turns off when time unit is M or S.
3. Time range indicator: turns on when the time base is H:M(Hours: Minutes) or M(Minutes). Turns off when the time base is M:S(Minutes : Seconds) or S(Seconds).
4. Timer indicators: T1 for first delay time, T2 for second delay time.
5. OUT indicator: Turns on when relay is on. Turns off when relay is off.
6. SET key. When timer is not running, press it will switch between first delay time setting (T1) and second delay time setting (T2); press and hold it for 3 second will enter the programming mode.
7. Down key / STP key: When timer is not running, press it will lower the time setting value. When timer is running, press it will stop the timer. In the programming mode, press it will go to the next programming value.

8. Up key / PAU key: When timer is not running, press it will increase the time setting value. When timer is running, press and hold it will pause the timer. The timer will continue running after this key is released. In the programming mode, press it will go to the previous programming value.
9. RST key: Reset key. When timer is running, press it will restart the timer. If "RUN" parameter is set to RST, press it will start the timer after powered up.
10. LED digital display. During normal operation as a timer, the top displays the actual time; the bottom displays the set value. In programming mode, the top displays setting parameters; the bottom displays programming value.

### 4. Terminal Assignment

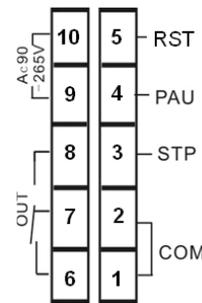


Figure 2. Terminal assignment

Terminal functions when timer is running:  
 Pause(PAU),Stop(STP), Reset(RST), Common(COM).  
 Connecting PAU and COM: Timer stops running. Timer will resume running when they are disconnected.  
 Connecting STP and COM: Timer stops running.  
 Connecting RST and COM: Timer stops running and reset. Timer will restart when they are disconnected.

### 5. How to Set the Timer and Relay Delay Time T1/T2

**When timer is not running**, press "SET" key to shift between relay delay time T1 and T2. Simply press up/ down key will increase/ decrease the set value of each delay time. (hold up/down key to speed up changing).  
 For how to program the relay delay time in different relay output mode, please see the definition of **Func** in next section.

### 6. Programming

Press SET key for 3 seconds to enter programming mode. For each parameter setting, use up/down key to select different programming values. Press SET key to confirm and move on to next parameter. See figure 3 next page for the procedure. For the definition of each programming value, see following section.

# Instruction Manual

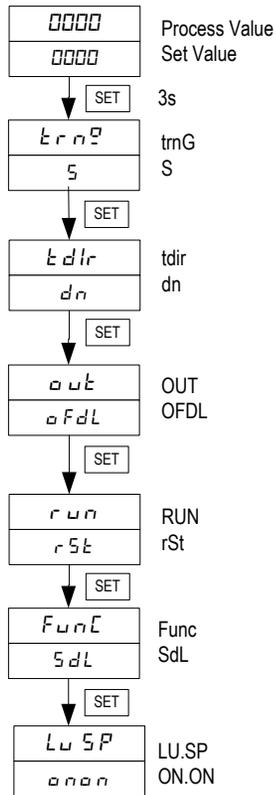


Figure 3. Flow chart of programming

## Definition of Programming Values:

### trnG, Timer range

S: 0.01s~99.99s;

M:S: 1s~99m59s;

M: 1m~9999m;

H:M: 1m~99h59m

### tdir, Timing direction

up: Counting up

dn: Counting down

### OUT, Relay output mode

OFDL(off delay): Relay will be on at the start of timer and off when time reach the set point.

ONDL(on delay): Relay will stay off at the start of timer and on when time reach the set

### RUN, Timer starting run mode

PU(power up): Timer starts when powered up

rSt(reset): Timer starts when reset button is pressed and released

### Func, Timer operating function mode

sdL(single delay): Relay turns on at the beginning of relay delay time T1/T2(OFDL); Relay turns on at the end of relay delay time T1/T2(ONDL). It will not change until the timer is reset or powered off and on again.

Dint (delayed interval): Relay turns on at the end of T1 time delay then off at the end of T2 time delay (OFDL); Relay turns off at the end of T1 time delay then on at the end of T2 time delay (ONDL). There is no repeat.

CYCL(cycle): Repeat relay on and off in cycle. Relay turns on at the end of T1 time delay then off at the end of T2 time delay (OFDL); Relay turns off at the end of T1 time delay then on at the end of T2 time delay (ONDL). It will repeat this cycle until power is off.

### LU.SP: Key locker for the two key pads in the middle.

This parameter determines if the two keys in the middle will be locked for timer value setting or stop/pause function. For applications that repeat the same time setting, user may want the lower and up key to be locked to prevent any accidental change. For some applications, user may want the Stop and Pause function to be deactivated to prevent stopping the timer by accident. LU.SP represents Lower, Up, Stop and Pause function. OF means the function is turned off and ON means the function is turned on.

LU.SP set to OF.ON means the lower and up keys are deactivated (turned off), but Stop and Pause keys are still functional (turned on)

ON.OF means lower and up keys are functional, but Stop and Pause functions are turned off.

OF.OF means lower and up keys, Stop and Pause functions are all locked up .

ON.ON means lower and up keys, Stop and Pause functions are all functional.

\*Note: When the Stop and Pause are locked from the front keys, the Stop and Pause function can still be executed from the back terminals.

## 7. Wiring Example

Please see figure 4 on the next page for the wiring example.

# Instruction Manual


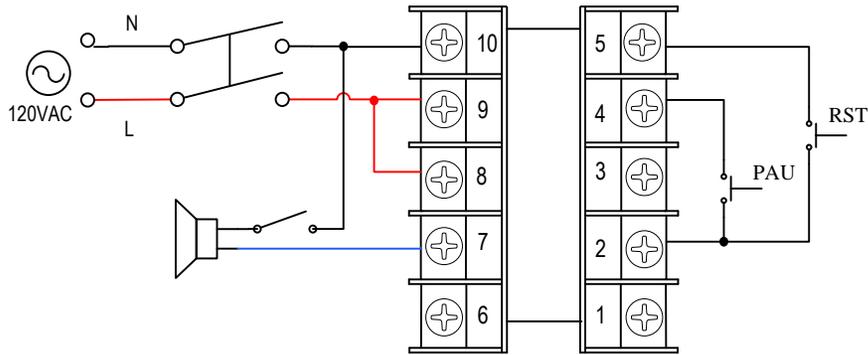



Figure 4. Wiring example of JSL-71. Power (120 or 240V AC) is sent to terminal 9 and 10. The external reset (RST) and pause (PAU) switch should be momentary type. They are needed only if you want to control the timer remotely. Otherwise, you can use the front keys on the timer. These switches can also be replaced with a control signal from computer or other control devices. **The alarm speaker used in this example is also optional. It is to show how to wire the output. You can substitute it with any output such as a coffee grinder.** The output terminals (#6, 7 and 8) are from a “C form” internal relay. It is a dry switch that does not provide the power by itself. In this case, the alarm is powered by the 120VAC. The external switch connected to the alarm is for disabling the sound if needed.

## 8. Timing Diagrams

Following diagrams show relay output ON/OFF time under different relay output modes and operating function modes. Please note: 1) “RUN” is set to “rSt” in following examples, powering up to start the timer is not discussed here. 2) Timer starts counting from the moment when reset key/switch is released or input (TTL) signal is from low to high. 3) Timer display stops counting as soon as stop key/ switch is pressed (from high to low), but relay output will only be triggered when stop key/switch is released (from low to high).

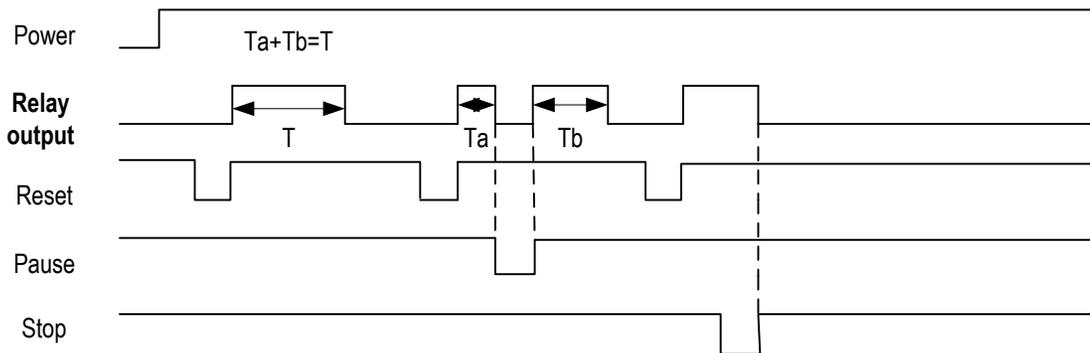


A. single delay (delay off)

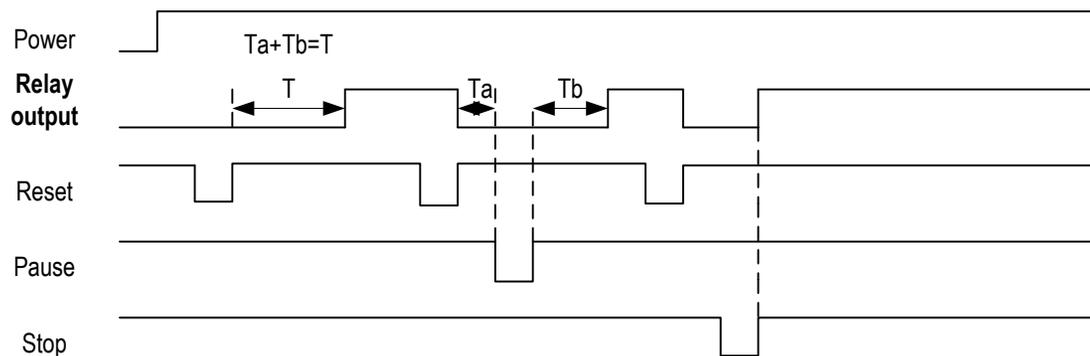


B. single delay (delay on)


**Instruction Manual**

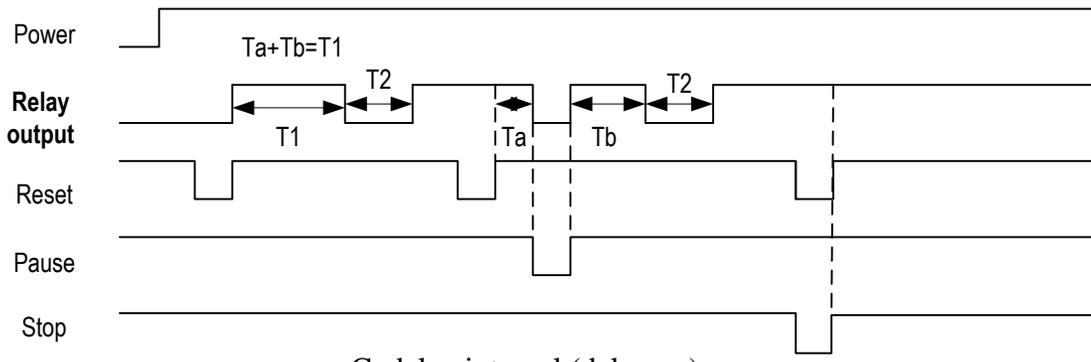


C. delay interval (delay on)

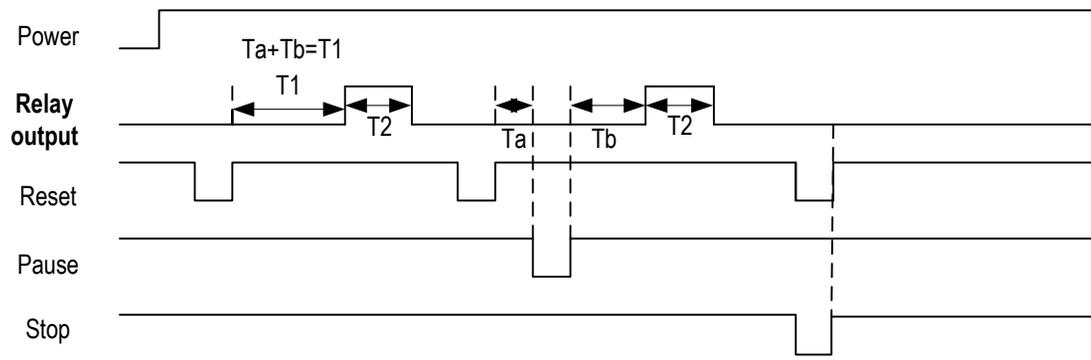

D. delay interval (delay off)

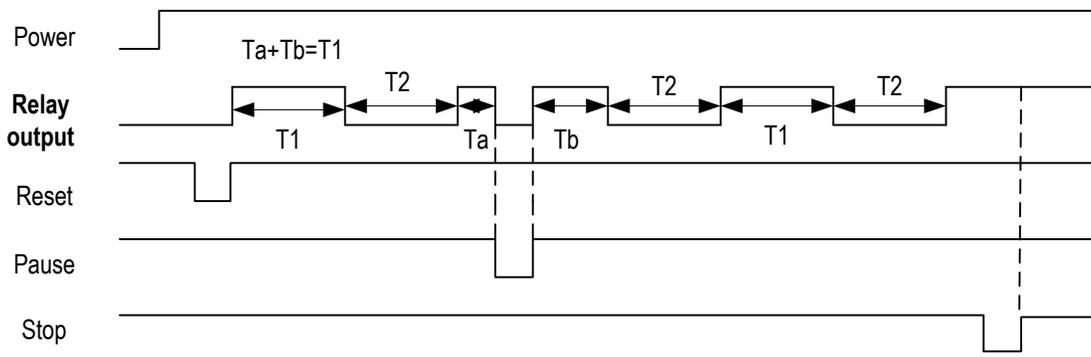

E. cycle (delay on)

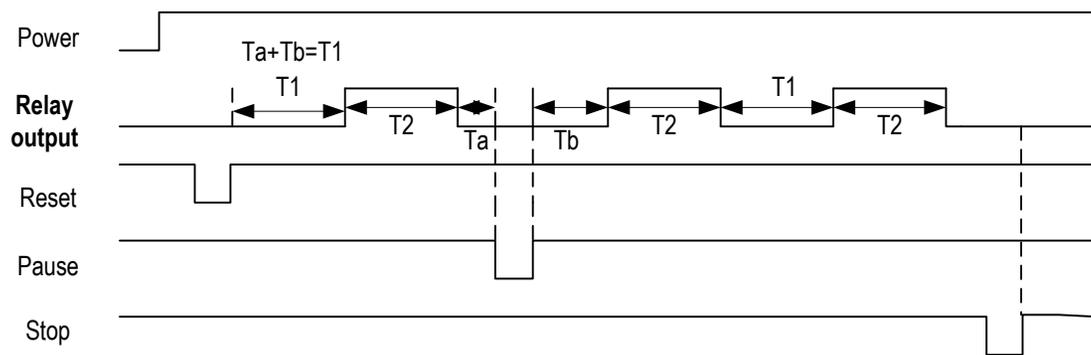

F. cycle (delay off)